


DAHUA®

密闭阀控铅酸蓄电池

SEALED LEAD-ACID BATTERIES

DHB12360 (12V 36AH)

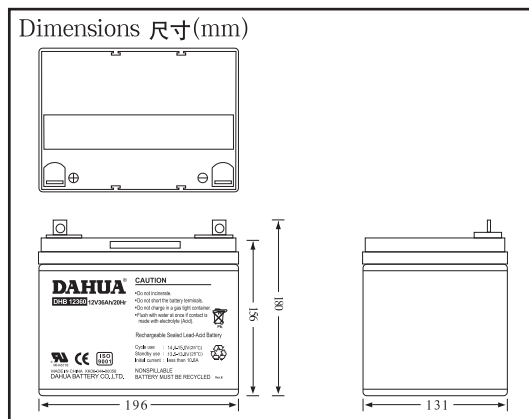


Specifications 规格

Nominal Voltage 额定电压	12V		
Rated Capacity(20 hour rate) 20小时率额定容量	36AH		
尺寸 Dimensions ±1mm	Length 长	196mm(7.72")	
	Width 宽	131mm(5.16")	
	Height 高	156mm(6.14")	
	Total Height (with terminals) 总高含端子	180mm(7.09")	
Weight 重量	Approx. 12.1kg(26.62lbs)		
Standard Terminal 标准端子	A3		

放电特性

Discharge Characteristics(20°C, 68°F)

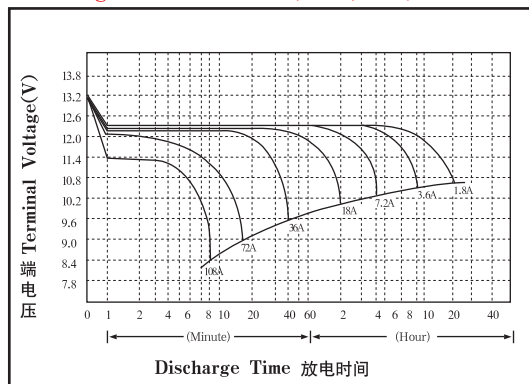

Electrical Specifications 电性能

容量 Capacity 77°F(25°C)	20 hour rate (1.80A)	20小时率	36AH
	10 hour rate (3.35A)	10小时率	33.5AH
	5 hour rate (6.20A)	5小时率	31AH
	1 hour rate (21.6A)	1小时率	21.6AH
Internal Resistance 内阻	Fully charged battery 充足电 77°F(25°C)		10m Ω
Capacity 温度	104°F(40°C)		102%
Affected by 对容量	77°F(25°C)		100%
Temperature 影响	32°F(0°C)		85%
(20 hour rate) 20小时率	5°F(-15°C)		65%
自放电 Self-Discharge 77°F(25°C)	Capacity after 3 month storage		92%
	Capacity after 6 month storage		83%
	Capacity after 12 month storage		65%
Charge 充电 Constant (恒压) Voltage	循环使用: 首次充电电流低于10.8A 电压: 14.4-15.0V 77°F(25°C) 浮充使用: 电压13.5-13.8V 77°F(25°C) Cycle: Initial Charging Current less than 10.8A Voltage 14.4-15.0V 77°F(25°C) Standby: Voltage 13.5-13.8V 77°F(25°C)		

放电特性

Discharge Characteristics(0°C/32°F, 40°C/104°F)

